

CHARLES B. GORDON
THOMAS P. SCHILLER
DAVID B. DEIOMA
JOSEPH J. CORSO
HOWARD G. SHIMOLA
JEFFREY J. SOPKO
JOHN P. MURTAUGH
JAMES M. MOORE
MICHAEL W. GARVEY
RICHARD A. SHARPE
RONALD M. KACHMARIK
PAUL A. SERBINOWSKI
BRIAN G. BEMBENICK
AARON A. FISHMAN

10/ 035 930

CEG


PEARNE & GORDON LLP

ATTORNEYS AT LAW
1801 EAST 9th STREET
SUITE 1200
CLEVELAND, OHIO 44114-3108
TEL: (216) 579-1700 FAX: (216) 579-6073
EMAIL: ip@pearnegordon.com

STEPHEN S. WENTSLER
ROBERT F. BODI
SUZANNE B. GAGNON
UNA L. LAURICIA
STEVEN J. SOLOMON
GREGORY D. FERNENGEL

OF COUNSEL
LOWELL L. HEINKE
THADDEUS A. ZALENSKI

PATENT, TRADEMARK,
COPYRIGHT AND RELATED
INTELLECTUAL PROPERTY LAW



September 14, 2005

Mail Stop Certificate of Corrections Branch
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Certificate
SEP 23 2005
of Correction

Re: U.S. Patent No.: 6,898,649 B2
Issued: May 24, 2005
Inventor: Goudie
Our Docket: 34260


Sir:

A Certificate of Correction under 35 U.S.C. 254 is hereby requested to correct Patent Office printing errors in the above-identified patent. Enclosed herewith is a proposed Certificate of Correction (Form No. PTO-1050) for consideration along with appropriate documentation supporting the request for correction.

It is requested that the Certificate of Correction be completed and mailed at an early date to the undersigned attorney of record. The proposed corrections are obvious ones and do not in any way change the sense of the application.

We understand that a check is not required since the errors were on the part of the Patent and Trademark Office in printing the patent.

Very truly yours,

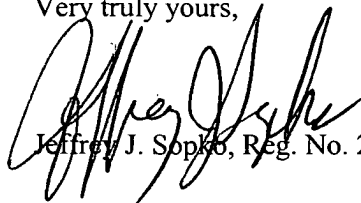
Jeffrey J. Sopko, Reg. No. 27676

JJS:vlm
Enclosures

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail in an envelope addressed to: Mail Stop Certificate of Corrections Branch, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on the date indicated below.

Jeffrey J. Sopko
Name of Attorney for Applicant(s)

September 14, 2005
Date


Signature of Attorney

SEP 23 2005

**UNITED STATES PATENT AND TRADEMARK OFFICE
CERTIFICATE OF CORRECTION**

PATENT NO. : 6,898,649 B2

PAGE 1 OF 1

DATED : May 24, 2005

INVENTOR(S) : Goudie

It is certified that error appears in the above-identified patent and that said Letters Patent is hereby corrected as shown below:

Column 2

Line 57, please delete "a synchronous" and insert therefor --asynchronous--.

Column 3

Line 20, please delete "a synchronous" and insert therefor --asynchronous--.

Column 3

Line 35, after "5A to" please delete "SD" and insert therefor --5D--.

Column 4

Line 61, after "CODEC" please insert --25C.--.

Column 4

Line 65 please delete "arbit₁₃ en" and insert therefor --'arbit_en'--.

Column 5

Line 13, please delete "Clock" and insert therefor --clock--.

Column 5

Line 55, please delete "be come b us" and insert therefor --become bus--.

MAILING ADDRESS OF SENDER:

Jeffrey J. Sopko
Pearne & Gordon LLP
1801 East 9th Street
Suite 1200
Cleveland, Ohio 44114-3108

PATENT NO. 6,898,649 B2

No. of additional copies

 0

SEP 23 2005

Preferably, the queue users are a communication control block, a host queue user, a voice encoder and decoder, and a processor forming part of the re-usable microprocessor block. Conveniently, each of the queue users is connected to the bus via its queue user interface and a respective bus master and bus tri-state driver.

5

The invention will now be described in greater detail, by way of example, with reference to the drawings in which:-

Figure 1 shows the system architecture for a QMS;

Figure 2 shows the system architecture for a QMS which is used for a Bluetooth
10 baseband peripheral; and

Figure 3 is a flow diagram illustrating the decision processes of a state machine forming part of the architecture of Figure 2.

Referring to the drawings, Figure 1 shows a system architecture which includes a QMS,
15 indicated by the dotted-line block 1, a queue manager software interface 2, a core (queue manager hardware) 3, and four identical queue portals 4A, 4B, 4C and 4D. The portals 4A to 4D are associated with respective queue users 5A to 5D by means of queue interfaces 6A to 6D. The queue users 5A to 5D are external entities that accesses data stored in a queue. The core 3 includes an arbiter 7, a "memory operation" block 8,
20 and a re-allocation block 9. The block 9 includes a block release table 9a and a removed blocks FIFO 9b, and communicates with a single port RAM 10. The arbiter 7 controls access to a bus 11 in a manner described below.

The QMS 1 uses the RAM 10 to hold data as it passes through the queues. The QMS 1
25 can support two types of queues, namely ~~asynchronous~~ asynchronous queues (which are intended to hold 'good' data which can be held for an indeterminate amount of time), and isochronous queues (which are intended to hold a small amount of time-critical data). The mean data rates of the generator and consumer of data in an isochronous queue should be approximately the same. The data may be read/written in bursts, which is typically why the queue system is required. For isochronous queues, the QMS 1 splits
30 the RAM 10 into memory blocks, which are linked together to form variable length FIFO queues. The QMS 1 can resize a queue (by adjusting the rules for adding memory

blocks) as the storage requirement changes. For isochronous queues, a smaller area of contiguous memory is used.

As mentioned above, for each queue user 5A to 5D there is a dedicated generic queue portal 4A to 4D. A queue portal 4A to 4D can be used to access a number of queues, although it can only read/write to one queue at a time. A queue user 5A to 5D will indicate which queues it wants to access, and will then do a series of reads (or writes). The queue portal 4A to 4D will map the reads (or writes) into RAM accesses. Within a memory block, the data will be stored at sequential locations. At the end of a memory block, the relevant queue portal 4A to 4D will follow a link to the next memory block in a chain, and start accessing the new memory block. The queue user 5A to 5D will not be aware of the linking process (although it will introduce delays to some accesses).

The read (or write) operations automatically update memory pointers provided in the queue portals 4A to 4D. However, for asynchronous queues in which data is expected to be good, there may be a requirement to repeat a series of reads/writes (e.g. due to a requirement to re-transmit a packet, or due to an error in a received packet). Therefore, the queue portals 4A to 4D each has a commit/discard mechanism. As well as the current read/write pointer (which is updated every read/write), there is a second pointer which can identify the start of a data block. A "data block" is not the same thing as a memory block, being a series of consecutive reads/writes, which may be stored within a memory block, or in a number of memory blocks. If a queue user 5A to 5D decides a data block should be re-read/re-written, it can do a 'discard', which loads the last stored 'start of data block' pointer into the current pointer. If the queue user 5A to 5D decides a data block is good, it can do a 'commit' which loads the current pointer into the 'start of data block' pointer. When a queue user 5A to 5D is writing to a queue, it will always decide to commit/discard before unloading the queue.

The QMS 1 also includes four flag bits that can indicate boundaries in the data flow. The flags are stored at the start of a memory block (they cannot identify a location within the block). If the most-significant bit (MSB) of the flags is set, the queue portal 4A to 4D will advance the current pointer to the start of the next memory block. New

The QMS 21 decides bus mastership for queue users 25A to 25D (only 25A to 25C of which are shown - the queue user 25D being constituted by the ARM7TDMI processor in the Firefly block 32), each of which has an associated user interface 26A to 26D. The queue user 25A is a communication control block (CCB), the queue user 25B is a host queue user (HOSTIF), the queue user 25C is a voice encoder and decoder (CODEC), and the queue user 25D is a processor. The queue portals associated with the interfaces 26A to 26D are not shown in Figure 2, being part of the QMS 21.

The QMS 21 communicates with the bus 31 via a bus master 33A and a bus tri-state driver 33B. Similarly, the user interfaces 26A to 26D are connected to the bus 31 via respective bus masters 34A, 35A, 36A and 37A and respective bus tri-state drivers 34B, 35B, 36B and 37B. The queue user 25A is connected to the bus 31 by a bus slave 38, the queue user 25B is connected to the bus 31 by a bus slave 39, and the CODEC 25C is connected to the bus 31 by a bus slave 40. The bus 31 is connected to the Firefly block 32 via up-integration module (UIM) to a bus interface (UBI) block 41 by a UIM bus 42. The processor user interface 26D is connected to the block 41 by a direct memory access (DMA) upload/download connection 43. The block 41 isolates the UIM bus 42 from the bus 31. The block 41 is connected to the bus 31 by a bus master 41A and a bus tri-state driver 41B. The processor 25D accesses the peripheral block B by getting the UBI block 41 to request bus mastership.

The peripheral block B thus has three main parts, namely:-

1. A link controller that interfaces to a radio, the link controller comprising the CCB 25A, the CCB queue user interface 26A, a CCB radio interface (CRI) 25R and a voice encoding translator (VET) 26T.
2. A buffer manager that stores data packets and allows processor interaction, the buffer manager comprising the UBI 41, the processor interface 26D, the QMS 21, and a block of the single port RAM 30.
3. A host interface that interfaces to an external host device (not shown), the host interface comprising the host queue user interface 26B, the host interface 25B

(which may be a UART), the voice queue user interface 26C and the CODEC 25C.

The arbiter 7 of the QMS 21 is responsible for determining which queue user 25A to 25D can access the bus 31, which in turn effects which user can access the RAM 32.

- 5 An external 'arbit_en' input signal (see Figure 1) acts as an enable to the arbiter 7. When enabled, the arbiter 7 includes the following priority levels.

Priority	Function
Highest	Continuation of un-interruptible operation
....	Active queue portal (round robin approach to provide guaranteed bandwidth)
....	Processor initiated start of un-interruptible operation
....	Processor access to Bluetooth block
Lowest	Re-allocation function

- 10 A state machine constituted by the arbiter 7 determines the 'active queue portal' arbitration. Every clock cycle, the state machine 7 cycles through the states, in a fixed order. The only exception is non-interruptible sequences which make the state machine wait in its current state. This sequence is:-

State	Priority Queue Portal
0	The queue portal for the user 25D
1	The queue portal for the user 25B
2	The queue portal for the user 25D
3	The queue portal for the user 25B
4	The queue portal for the user 25D
5	The queue portal for the user 25B
6	The queue portal for the user 25A
7	The queue portal for the user 25B
8	The queue portal for the user 25D
9	The queue portal for the user 25B
10	The queue portal for the user 25C
11	The queue portal for the user 25B
12	The queue portal for the user 25D
13	The queue portal for the user 25B
14	The queue portal for the user 25A
15	The queue portal for the user 25B

This system ensures a certain percentage of the bus bandwidth is available for each queue portal. The percentage of bus bandwidth allocated should be sufficient to meet the burst requirements of the queue portals, the HOSTIF 25B being allocated 50%, the processor 25D being allocated 31.25%, the CCB 25A being allocated 12.5%, and the CODEC 25C being allocated 6.25%. The queue portals should work with less than the allocated bandwidth, due to non-interruptible sequences that can temporarily increase the bandwidth used by other portals. (The implementation should allow these allocations to be changed easily.)

The arbiter 7 also includes an enable bit for each queue portal. The enable bit can be used to block requests for mastership (although this will not effect the sequence of the state machine).

15

If the queue portal currently selected by the state machine (arbiter) 7 does not request bus mastership, either because it has no data to transfer or it has been disabled, then one of the lower priority functions can become bus master. The next level of priority is used for "non-interruptible memory sequences", which are triggered by the processor 25D. These operations involve reading from memory, and then modifying the contents of the memory based on what was read. Starting these operations is considered lower priority than queue portal operations (once started, they complete as non-interruptible operations which have the highest priority in the arbiter 7). However, the processor 25D assumes that, once it triggers a non-interruptible memory sequence, by the next time the processor accesses the memory, the non-interruptible memory sequence will be complete. Therefore, non-interruptible memory sequences have to be higher priority than the processor 25D. The next level of priority is the processor 25D accesses to the UBI block 41. The processor 25D is treated as being lower priority than the queue portals so that the bandwidth available to the queue portals can be guaranteed. If the processor 25D attempts to become bus master while a higher priority function is using the bus 31, the processor is held in a wait state. This adds some uncertainty to the speed at which software remaining on the processor 25D will operate, but this is taken

30

into account when writing the software. The processor 25D should not be held up by low priority functions, and so needs to have a higher priority than these other non-time-critical functions. (In addition, the processor 25D can modify a control bit in the UBI block 41 which disables the normal arbiter 7, and makes the UBI block the bus master, thereby making the processor the highest priority bus master. However, this bit is not used in normal operation.) If no other function is requesting to be bus master, the QMS 21 becomes bus master, and can use the 'spare' bus cycles to do low priority accesses, such as block re-allocation.

Figure 3 is a flow chart illustrating the decision processes of the arbiter 7. The processes start at step 100, and, in step 101 the arbiter 7 checks to see if it is enabled. If not, the block 40 has bus mastership (step 102), and the arbiter proceeds to step 103 to wait for the next clock cycle, at which stage step 101 is repeated.

If the arbiter 7 is enabled, step 104 queries whether the current bus master requests retention of mastership. If so, that bus master is granted retention of bus mastership (in step 105), and the arbiter 7 then returns to step 103 to wait for the next clock cycle. If the current bus master did not request retention of mastership, the arbiter 7 proceeds to step 106, where the queue portal is advanced in round robin fashion. If the queue portal selected in this manner requests bus mastership step (107), the selected queue portal is granted bus mastership (or passes mastership to the associated queue user) - in step 108. The programme then returns to step 103 to wait for the next clock cycle.

If the queue portal selected does not request bus mastership, the QMS core is asked whether a processor initiated memory operation has requested bus mastership (step 109). If the answer to this question is yes, a memory operation block in the QMS core is granted bus mastership (step 110), and the arbiter 7 then returns to step 103 to wait for the next clock cycle. If a processor initiated memory operation has not requested bus mastership, a check is made (step 111) to see whether the processor 25D has requested a bus mastership via the block 41. If such a request has been made, the block 41 is granted bus mastership (step 112) and the arbiter 7 returns to step 103 to wait for the next clock cycle.